

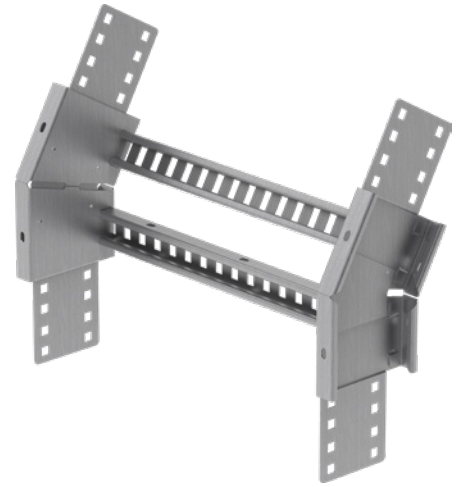


30° OUTSIDE RISER

Couplers not required
Supplied with cable ladder fixings
All dimensions in mm
Example configuration shown

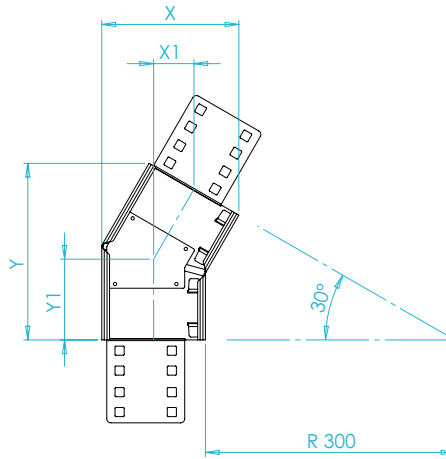

	PARTCODE *	WIDTH 'W'	W1	X1	X	Y1	Y
MEDIUM DUTY 100mm Side Height	AL100-OR30-150-R300-BB/PG	150	200	47	140	94	200
	AL100-OR30-200-R300-BB/PG	200	250				
	AL100-OR30-300-R300-BB/PG	300	350				
	AL100-OR30-450-R300-BB/PG	450	500				
	AL100-OR30-600-R300-BB/PG	600	650				
	AL100-OR30-750-R300-BB/PG	750	800				
	AL100-OR30-900-R300-BB/PG	900	950				
HEAVY DUTY 125mm Side Height	AL125-OR30-150-R300-BB/PG	150	200	49	165	97	213
	AL125-OR30-200-R300-BB/PG	200	250				
	AL125-OR30-300-R300-BB/PG	300	350				
	AL125-OR30-450-R300-BB/PG	450	500				
	AL125-OR30-600-R300-BB/PG	600	650				
	AL125-OR30-750-R300-BB/PG	750	800				
	AL125-OR30-900-R300-BB/PG	900	950				
ULTRA HEAVY DUTY 150mm Side Height	AL150-OR30-150-R300-BB/PG	150	200	50	190	100	225
	AL150-OR30-200-R300-BB/PG	200	250				
	AL150-OR30-300-R300-BB/PG	300	350				
	AL150-OR30-450-R300-BB/PG	450	500				
	AL150-OR30-600-R300-BB/PG	600	650				
	AL150-OR30-750-R300-BB/PG	750	800				
	AL150-OR30-900-R300-BB/PG	900	950				

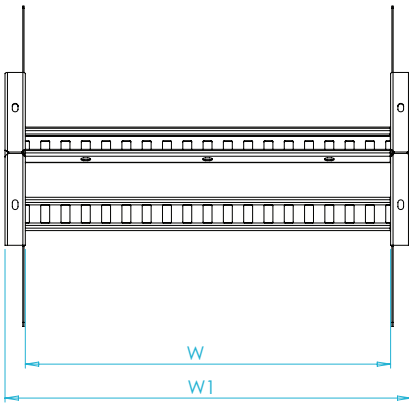

*Pre-Galv shown.
Change partcode suffix
for other finish

FOR OTHER AVAILABLE SIDE HEIGHTS:

ULTRA LIGHT DUTY
60mm Side Height

PLEASE USE **AL060** IN THE PARTCODE

LIGHT DUTY
85mm Side Height

PLEASE USE **AL085** IN THE PARTCODE

TECHNICAL GUIDE - PAGES 46-62