

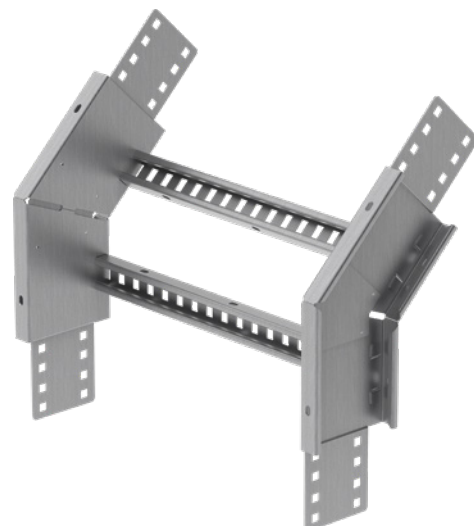


45° OUTSIDE RISER

Couplers not required
Supplied with cable ladder fixings
All dimensions in mm
Example configuration shown

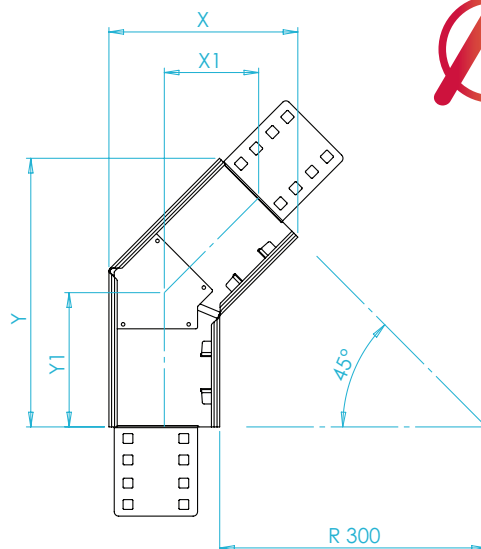

	PARTCODE *	WIDTH 'W'	W1	X1	X	Y1	Y
MEDIUM DUTY 100mm Side Height	AL100-OR45-150-R300-BB/PG	150	200	103	188	145	283
	AL100-OR45-200-R300-BB/PG	200	250				
	AL100-OR45-300-R300-BB/PG	300	350				
	AL100-OR45-450-R300-BB/PG	450	500				
	AL100-OR45-600-R300-BB/PG	600	650				
	AL100-OR45-750-R300-BB/PG	750	800				
	AL100-OR45-900-R300-BB/PG	900	950				
HEAVY DUTY 125mm Side Height	AL125-OR45-150-R300-BB/PG	150	200	106	213	150	301
	AL125-OR45-200-R300-BB/PG	200	250				
	AL125-OR45-300-R300-BB/PG	300	350				
	AL125-OR45-450-R300-BB/PG	450	500				
	AL125-OR45-600-R300-BB/PG	600	650				
	AL125-OR45-750-R300-BB/PG	750	800				
	AL125-OR45-900-R300-BB/PG	900	950				
ULTRA HEAVY DUTY 150mm Side Height	AL150-OR45-150-R300-BB/PG	150	200	110	238	155	318
	AL150-OR45-200-R300-BB/PG	200	250				
	AL150-OR45-300-R300-BB/PG	300	350				
	AL150-OR45-450-R300-BB/PG	450	500				
	AL150-OR45-600-R300-BB/PG	600	650				
	AL150-OR45-750-R300-BB/PG	750	800				
	AL150-OR45-900-R300-BB/PG	900	950				

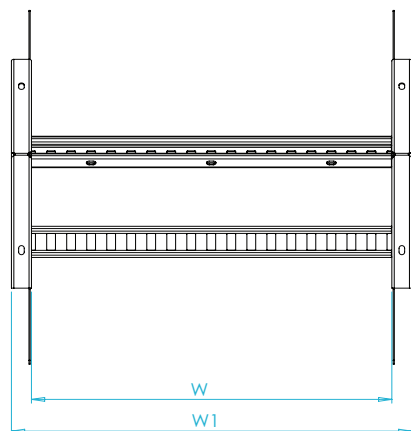

*Pre-Galv shown.
Change partcode suffix
for other finish

FOR OTHER AVAILABLE SIDE HEIGHTS:

ULTRA LIGHT DUTY

60mm Side Height

PLEASE USE **AL060** IN THE PARTCODE

LIGHT DUTY

85mm Side Height

PLEASE USE **AL085** IN THE PARTCODE

TECHNICAL GUIDE - PAGES 46-62